

**EXTERUS**



# Changing room lockers

HPL COMPACT panels Fundermax

# Premium Lockers Crafted for Excellence

Our lockers are built with high-quality 12 mm thick Fundermax HPL Compact panels and carefully selected fittings, ensuring exceptional durability and hygienic maintenance. These panels offer an extensive range of design options, making them a versatile choice for any setting.

---

## Key Features:

**Superior Durability:** Crafted to withstand water, alkali, and acid, our lockers are protected against decay and are mechanically resilient, promising long-lasting performance.

**Ergonomic Design:** Thoughtfully arranged with hooks, shelves, and ventilation points for optimal convenience and functionality.

**Customizable Security:** Choose from a variety of locking systems tailored to your needs, ranging from simple mechanical locks to sophisticated electronic locking systems.

---


Experience the perfect blend of durability, functionality, and style with our premium lockers, designed to meet your unique requirements.



## Lockers modifications


**L1**

One-door  
locker

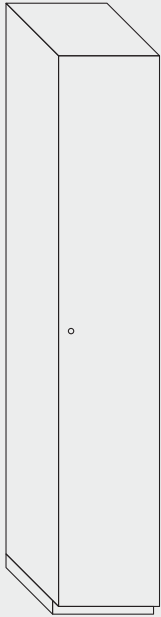


**L2**

Two-door  
locker

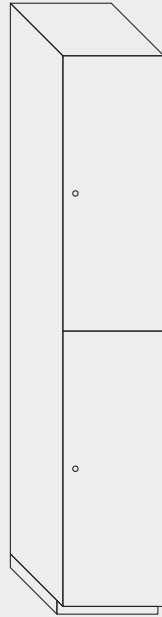


**LS1**

One-door locker  
with a seat

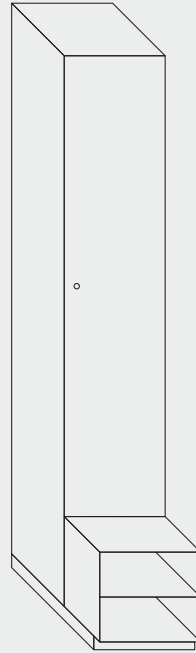


**LS2**





Two-door locker  
with a seat

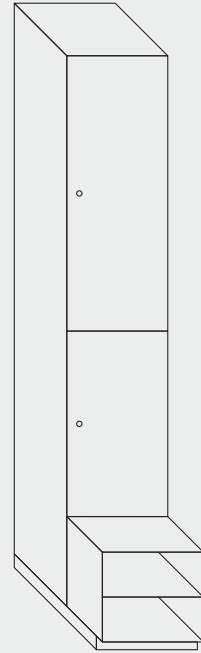

Widths available **300 / 350 / 400 mm**



Blocks available **x1 - x6**





Changing room lockers






**L1**

One-door  
locker

Widths available  
**300 / 350 / 400 mm**





Blocks available  
**x1 - x6**



## L1 / Measurements

---

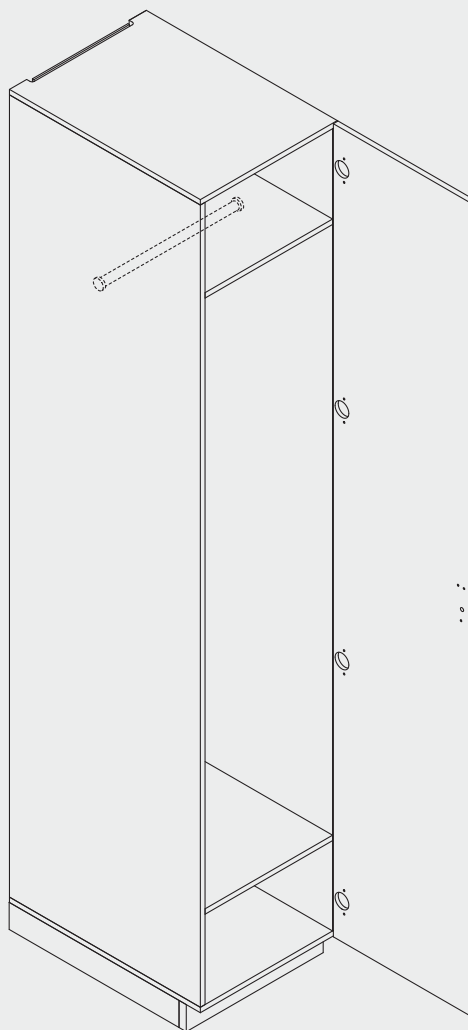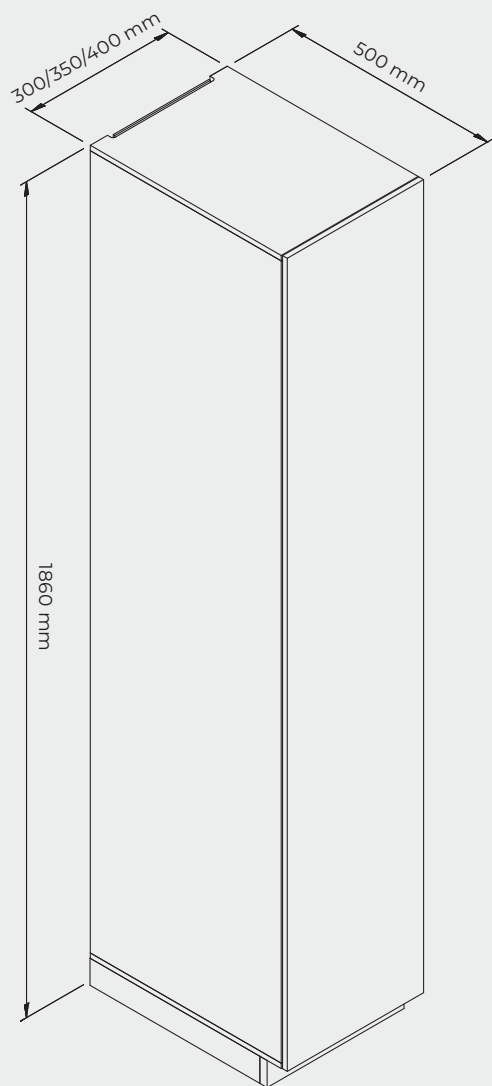

## L1 / Components

---



















Hinge



Clothing rack



Lock (optional)


L1 variations	Code	Width of unit	Whole width	Height	Depth
	<b>L1-300x1</b>	300 mm	300 mm	1860 mm	500 mm
	<b>L1-300x2</b>	300 mm	588 mm	1860 mm	500 mm
	<b>L1-300x3</b>	300 mm	876 mm	1860 mm	500 mm
	<b>L1-300x4</b>	300 mm	1164 mm	1860 mm	500 mm
	<b>L1-300x5</b>	300 mm	1452 mm	1860 mm	500 mm
	<b>L1-300x6</b>	300 mm	1740 mm	1860 mm	500 mm
	<b>L1-350x1</b>	350 mm	350 mm	1860 mm	500 mm
	<b>L1-350x2</b>	350 mm	688 mm	1860 mm	500 mm
	<b>L1-350x3</b>	350 mm	1026 mm	1860 mm	500 mm
	<b>L1-350x4</b>	350 mm	1364 mm	1860 mm	500 mm
	<b>L1-350x5</b>	350 mm	1702 mm	1860 mm	500 mm
	<b>L1-350x6</b>	350 mm	2040 mm	1860 mm	500 mm
	<b>L1-400x1</b>	400 mm	400 mm	1860 mm	500 mm
	<b>L1-400x2</b>	400 mm	788 mm	1860 mm	500 mm
	<b>L1-400x3</b>	400 mm	1176 mm	1860 mm	500 mm
	<b>L1-400x4</b>	400 mm	1564 mm	1860 mm	500 mm
	<b>L1-400x5</b>	400 mm	1952 mm	1860 mm	500 mm
	<b>L1-400x6</b>	400 mm	2340 mm	1860 mm	500 mm




**L2**

Two-door  
locker

Widths available  
**300 / 350 / 400 mm**





Blocks available  
**x1 - x6**



## L2 / Measurements

---

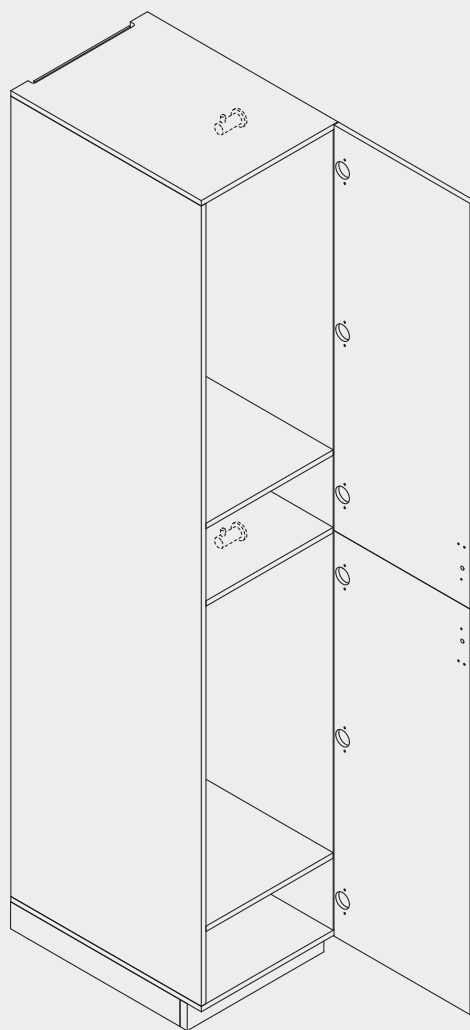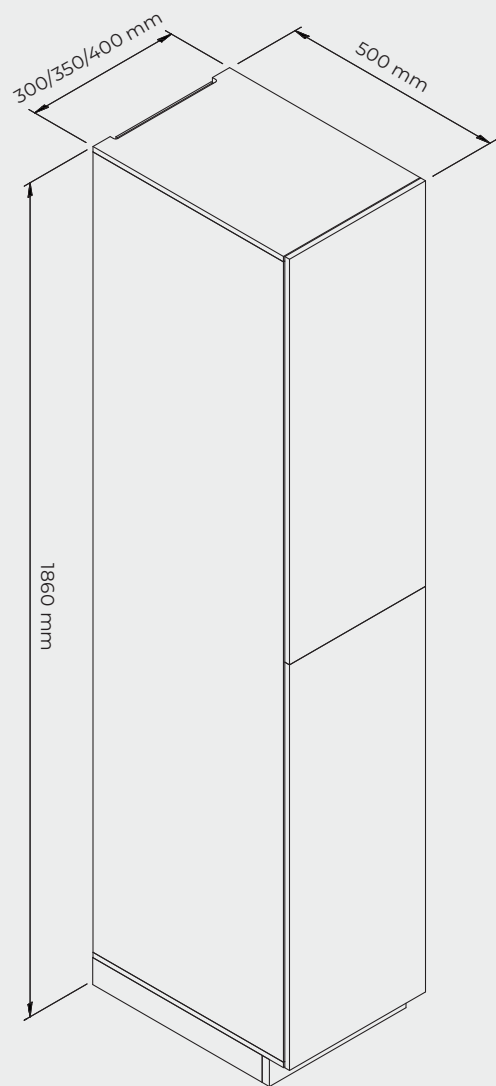

## L2 / Components

---




















Hinge



Hook



Lock (optional)


L2 variations	Code	Width of unit	Whole width	Height	Depth
	<b>L2-300x1</b>	300 mm	300 mm	1860 mm	500 mm
	<b>L2-300x2</b>	300 mm	588 mm	1860 mm	500 mm
	<b>L2-300x3</b>	300 mm	876 mm	1860 mm	500 mm
	<b>L2-300x4</b>	300 mm	1164 mm	1860 mm	500 mm
	<b>L2-300x5</b>	300 mm	1452 mm	1860 mm	500 mm
	<b>L2-300x6</b>	300 mm	1740 mm	1860 mm	500 mm
	<b>L2-350x1</b>	350 mm	350 mm	1860 mm	500 mm
	<b>L2-350x2</b>	350 mm	688 mm	1860 mm	500 mm
	<b>L2-350x3</b>	350 mm	1026 mm	1860 mm	500 mm
	<b>L2-350x4</b>	350 mm	1364 mm	1860 mm	500 mm
	<b>L2-350x5</b>	350 mm	1702 mm	1860 mm	500 mm
	<b>L2-350x6</b>	350 mm	2040 mm	1860 mm	500 mm
	<b>L2-400x1</b>	400 mm	400 mm	1860 mm	500 mm
	<b>L2-400x2</b>	400 mm	788 mm	1860 mm	500 mm
	<b>L2-400x3</b>	400 mm	1176 mm	1860 mm	500 mm
	<b>L2-400x4</b>	400 mm	1564 mm	1860 mm	500 mm
	<b>L2-400x5</b>	400 mm	1952 mm	1860 mm	500 mm
	<b>L2-400x6</b>	400 mm	2340 mm	1860 mm	500 mm




# LS1

One-door locker with a seat

Widths available  
300 / 350 / 400 mm



Blocks available  
x1 - x6



Sitting box variation


Double - single



Double - double



## LS1 / Measurements

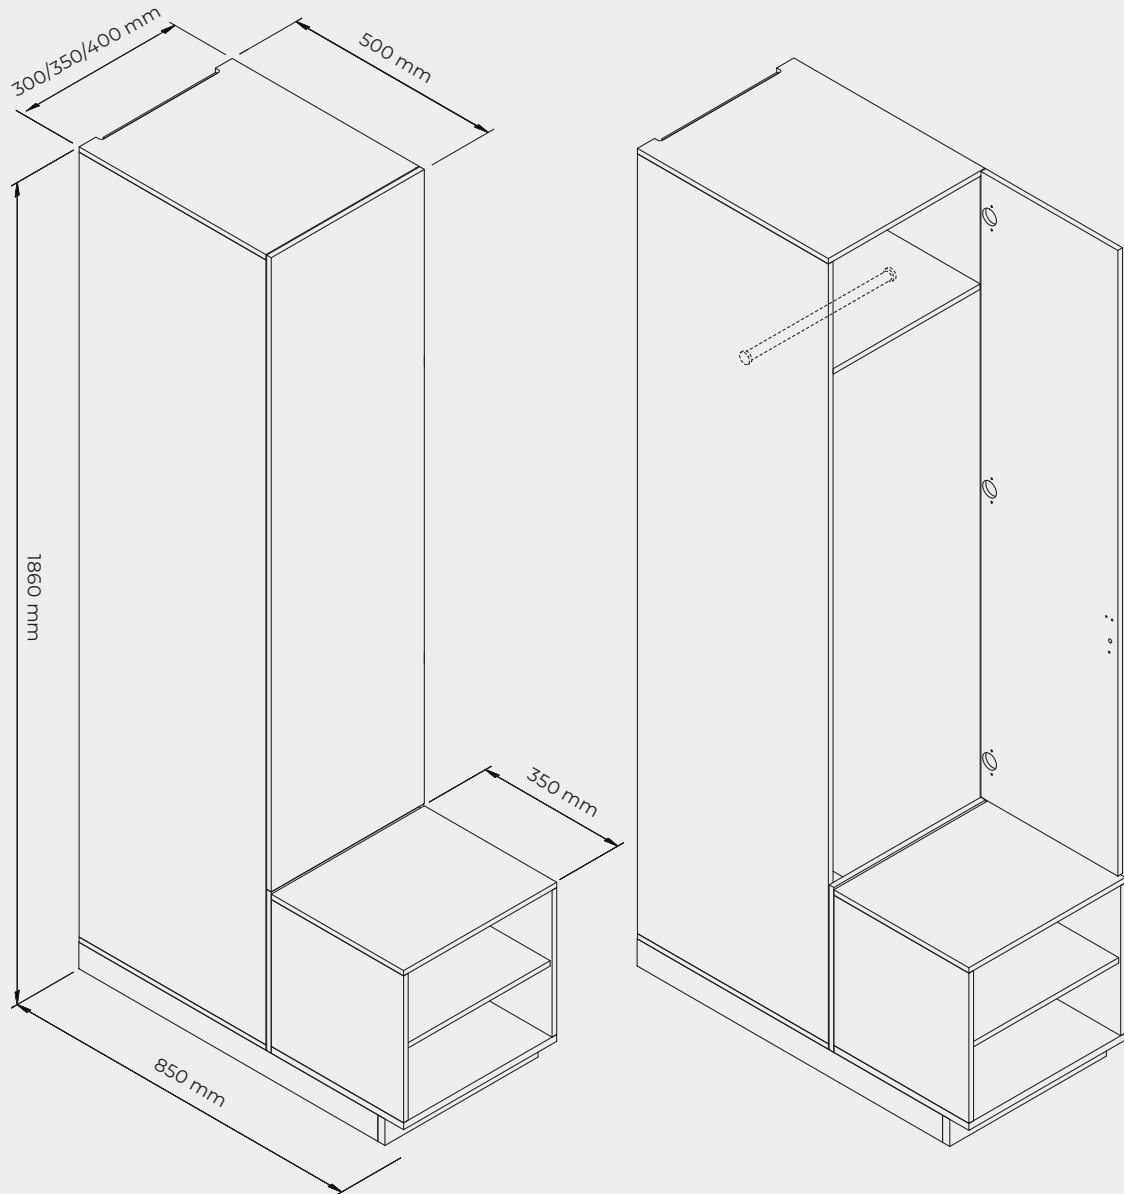

## LS1 / Components





















Hinge




Clothing rack



Lock (optional)


LS1 variations	Code	Width of unit	Whole width	Height	Depth
	<b>LS1-300x1</b>	300 mm	300 mm	1860 mm	500 mm
	<b>LS1-300x2</b>	300 mm	588 mm	1860 mm	500 mm
	<b>LS1-300x3</b>	300 mm	876 mm	1860 mm	500 mm
	<b>LS1-300x4</b>	300 mm	1164 mm	1860 mm	500 mm
	<b>LS1-300x5</b>	300 mm	1452 mm	1860 mm	500 mm
	<b>LS1-300x6</b>	300 mm	1740 mm	1860 mm	500 mm
	<b>LS1-350x1</b>	350 mm	350 mm	1860 mm	500 mm
	<b>LS1-350x2</b>	350 mm	688 mm	1860 mm	500 mm
	<b>LS1-350x3</b>	350 mm	1026 mm	1860 mm	500 mm
	<b>LS1-350x4</b>	350 mm	1364 mm	1860 mm	500 mm
	<b>LS1-350x5</b>	350 mm	1702 mm	1860 mm	500 mm
	<b>LS1-350x6</b>	350 mm	2040 mm	1860 mm	500 mm
	<b>LS1-400x1</b>	400 mm	400 mm	1860 mm	500 mm
	<b>LS1-400x2</b>	400 mm	788 mm	1860 mm	500 mm
	<b>LS1-400x3</b>	400 mm	1176 mm	1860 mm	500 mm
	<b>LS1-400x4</b>	400 mm	1564 mm	1860 mm	500 mm
	<b>LS1-400x5</b>	400 mm	1952 mm	1860 mm	500 mm
	<b>LS1-400x6</b>	400 mm	2340 mm	1860 mm	500 mm

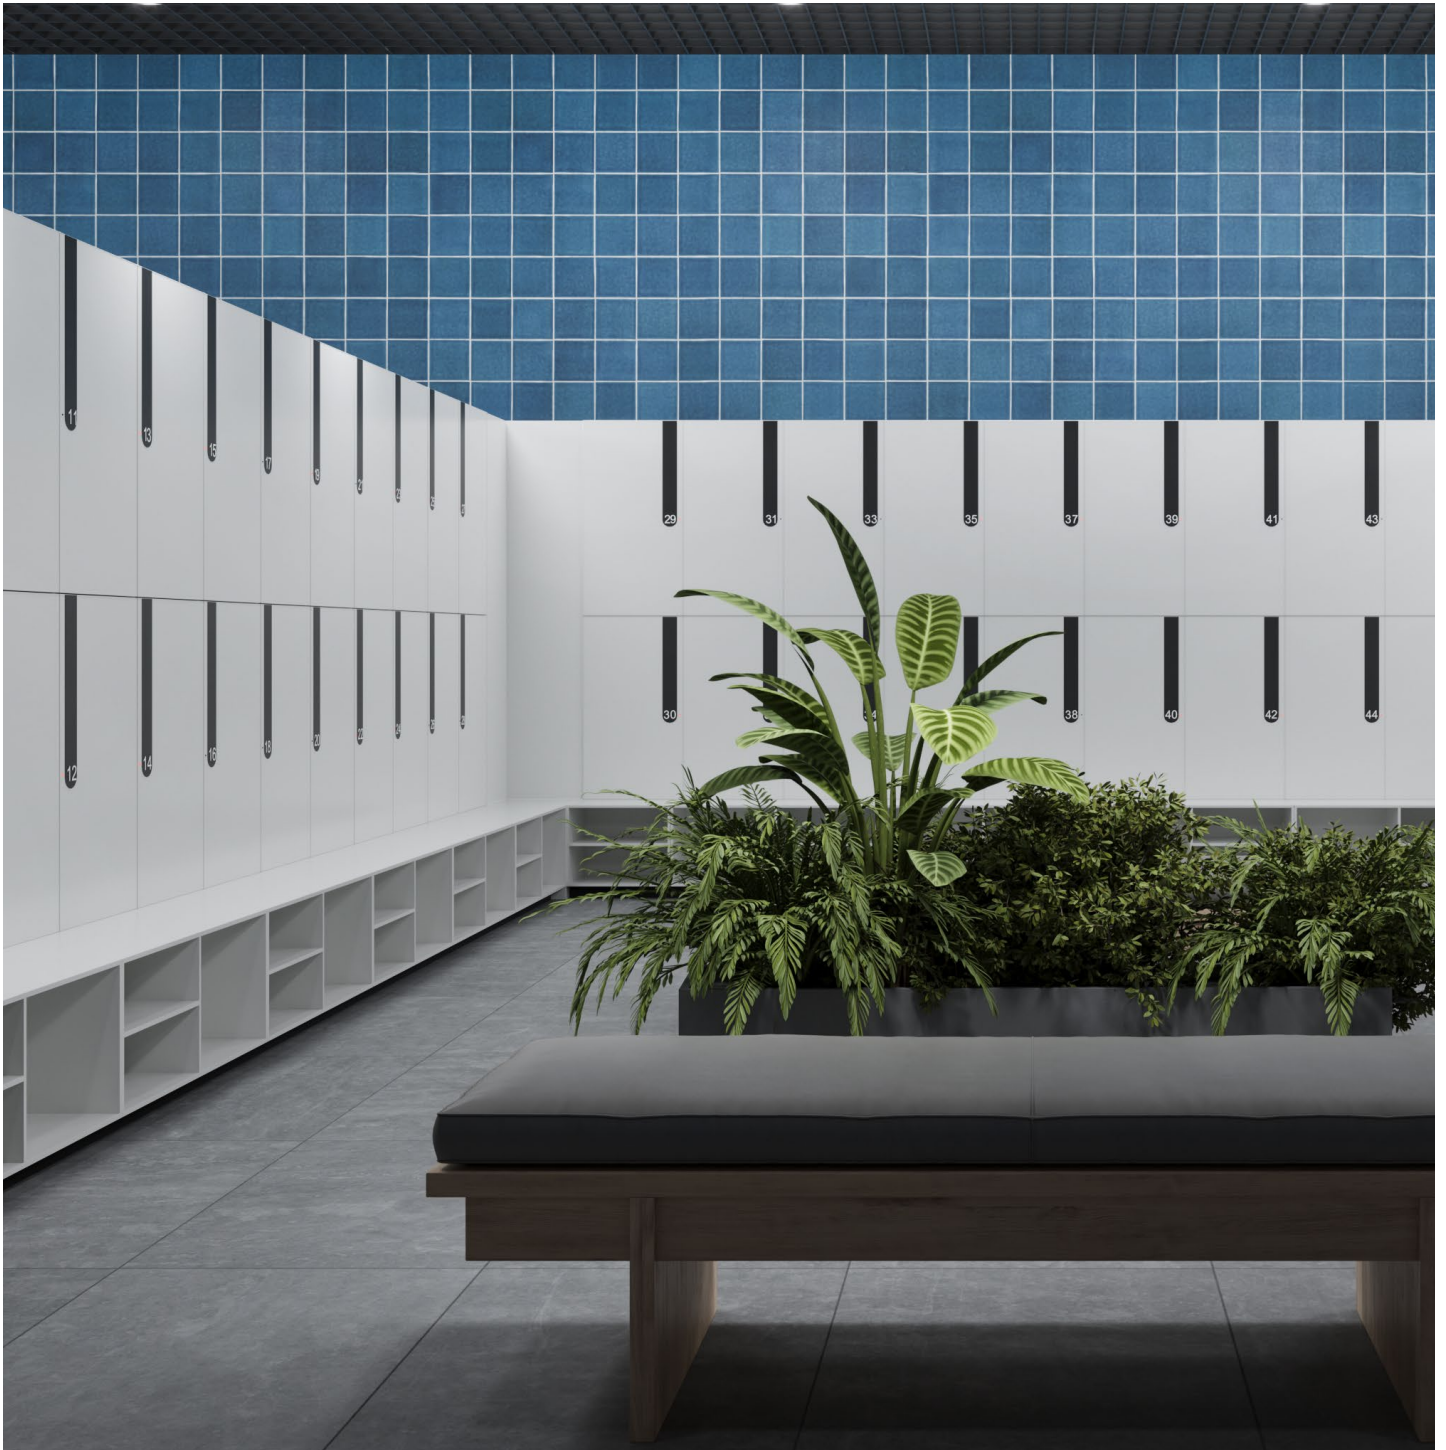


# LS2

Two-door locker  
with a seat

Widths available  
300 / 350 / 400 mm



Blocks available  
x1 - x6



Sitting box  
variation


Double - single



Double - double



## LS2 / Measurements

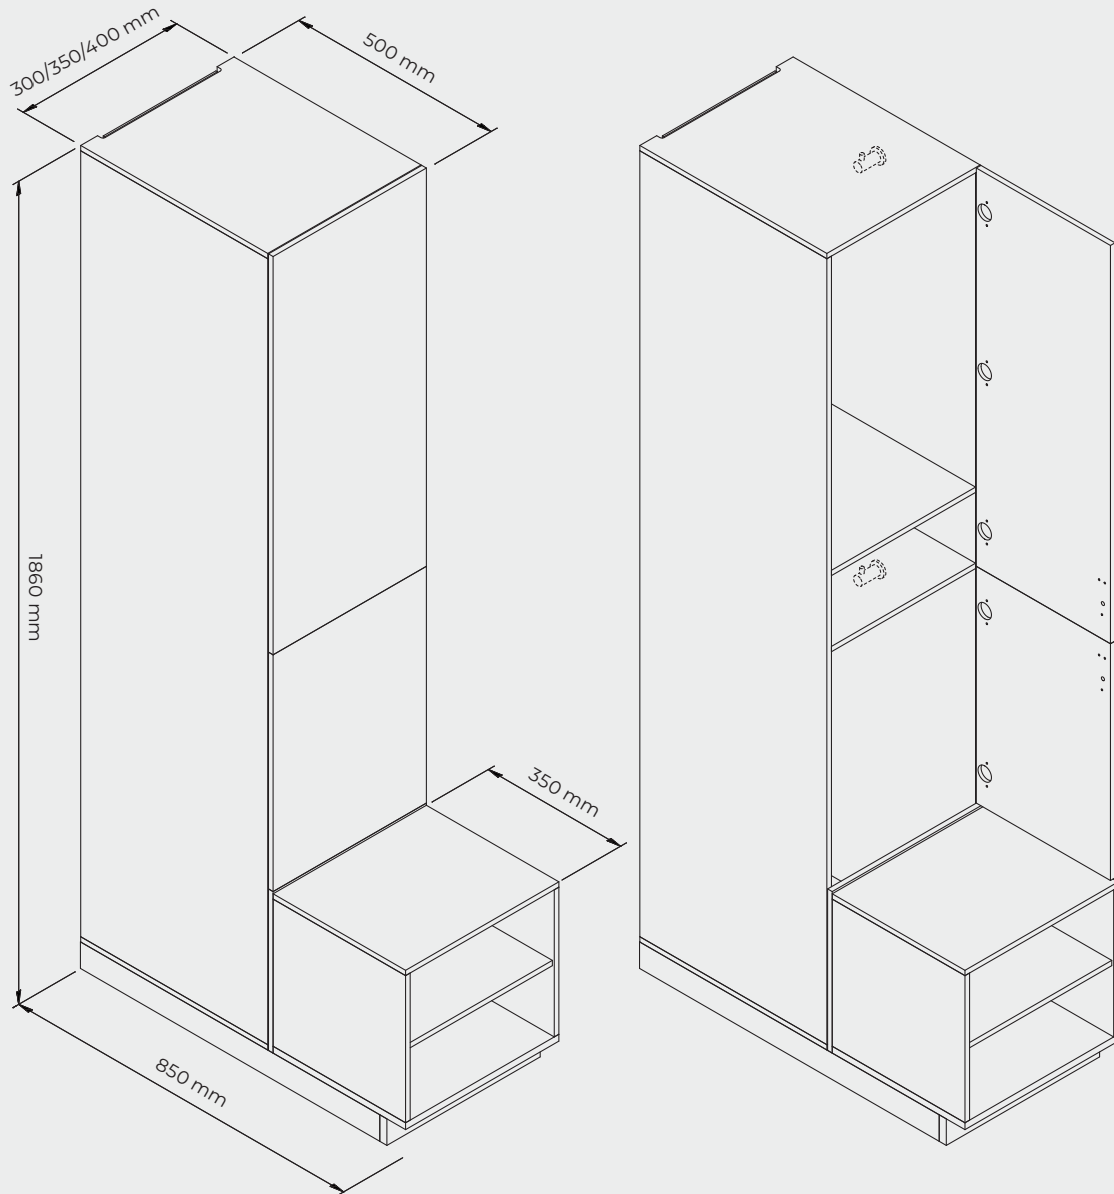

## LS2 / Components















Hinge



Hook



Lock (optional)

LS2 variations	Code	Width of unit	Whole width	Height	Depth
	<b>LS2-300x1</b>	300 mm	300 mm	1860 mm	500 mm
	<b>LS2-300x2</b>	300 mm	588 mm	1860 mm	500 mm
	<b>LS2-300x3</b>	300 mm	876 mm	1860 mm	500 mm
	<b>LS2-300x4</b>	300 mm	1164 mm	1860 mm	500 mm
	<b>LS2-300x5</b>	300 mm	1452 mm	1860 mm	500 mm
	<b>LS2-300x6</b>	300 mm	1740 mm	1860 mm	500 mm
	<b>LS2-350x1</b>	350 mm	350 mm	1860 mm	500 mm
	<b>LS2-350x2</b>	350 mm	688 mm	1860 mm	500 mm
	<b>LS2-350x3</b>	350 mm	1026 mm	1860 mm	500 mm
	<b>LS2-350x4</b>	350 mm	1364 mm	1860 mm	500 mm
	<b>LS2-350x5</b>	350 mm	1702 mm	1860 mm	500 mm
	<b>LS2-350x6</b>	350 mm	2040 mm	1860 mm	500 mm
	<b>LS2-400x1</b>	400 mm	400 mm	1860 mm	500 mm
	<b>LS2-400x2</b>	400 mm	788 mm	1860 mm	500 mm
	<b>LS2-400x3</b>	400 mm	1176 mm	1860 mm	500 mm
	<b>LS2-400x4</b>	400 mm	1564 mm	1860 mm	500 mm
	<b>LS2-400x5</b>	400 mm	1952 mm	1860 mm	500 mm
	<b>LS2-400x6</b>	400 mm	2340 mm	1860 mm	500 mm

# Product specification

---

## 1. Fixing

The hinges of the locker doors are made of corrosion-resistant steel. Two or three hinges are used for each door, and a concealed type of clamp is used for fixing the panels.

---

## 2. General data

- a. 12 mm Compact HPL panel is used for locker body and doors.
  - b. HPL panels are coated with melamine resin.
  - c. HPL panels meet the requirements of EN 438-4 Type CGS.
  - d. HPL panels are of the same decor on both sides.
  - e. HPL panels are suitable for interior decoration or partitioning where particular resistance is required, e.g. wall cladding, toilet or shower partitions, handrail infill, office furniture, etc.
- 

## 3. Material properties

- a. Density according to DIN 52350/ISO 1183:  $\geq 1350$  kg/cm<sup>3</sup>.
  - b. Abrasion resistance according to EN 438-2:2016, clause 10:  $\geq 150$ .
  - c. Resistance to the impact of a falling ball according to EN438-2:2016, clause 21: 8 mm.
  - d. Scratch resistance according to EN 438-2:2016, clause 25: Grade  $\geq 3$ ; scratch hardness  $\geq 3N$ .
  - e. Bending strength according to EN ISO 178:  $\geq 80$  MPa.
  - f. E-modulus according to EN ISO 178:  $\geq 9000$  MPa.
  - g. Crack resistance according to EN 438-2:2016, clause 24  $\geq 4$ .
  - h. Maximum expansion in % according to EN 438-2, clause 17: 0,3 % longitudinally, 0,6 % transversely.
  - i. Resistance to boiling water according to EN 438-2, clause 12: 2.0 %.
  - j. Flammability Euroclass D-s2,d0.
  - k. Fire resistance: NPD.
  - l. Water vapour permeability: NPD
  - m. Formaldehyde release: E1.
  - n. Sound absorption: NPD.
  - o. Resistance to temperature variations according to EN 438-7:2005: Compliant.
  - p. Resistance to immersion in boiling water according to EN 438-7:2005: Compliant.
  - q. Moisture resistance according to EN 438-7:2005: Compliant.
- 


## 4. Specifications:

- a. Body, facades, plinth: HPL Compact 12 mm.
- b. Back wall: HPL Compact 4 mm.
- c. Lock model: customers choice.
- d. Hangers: corrosion-resistant steel.
- e. Legs: adjustable height, H60 mm.


Changing room lockers / colors

Color examples


Sand



White




Glacier Blue




Atlantic



Tortora



Birch Grey




Marino



Lamar




Fresco




Jarde Green



Dark Grey




Midnight Plum



Costa




Fango



Charcoal




Mona lisa




Vivo




Slate Green



Graphite black



Blackberry Cupcake



## Gallery

---



[www.exterus.biz](http://www.exterus.biz)

## Decors

---



[www.fundermax.com](http://www.fundermax.com)